





Connecting Strength

USH +2, 5.5" Base Kit, w/K2 EverSeal




QUICK GUIDE

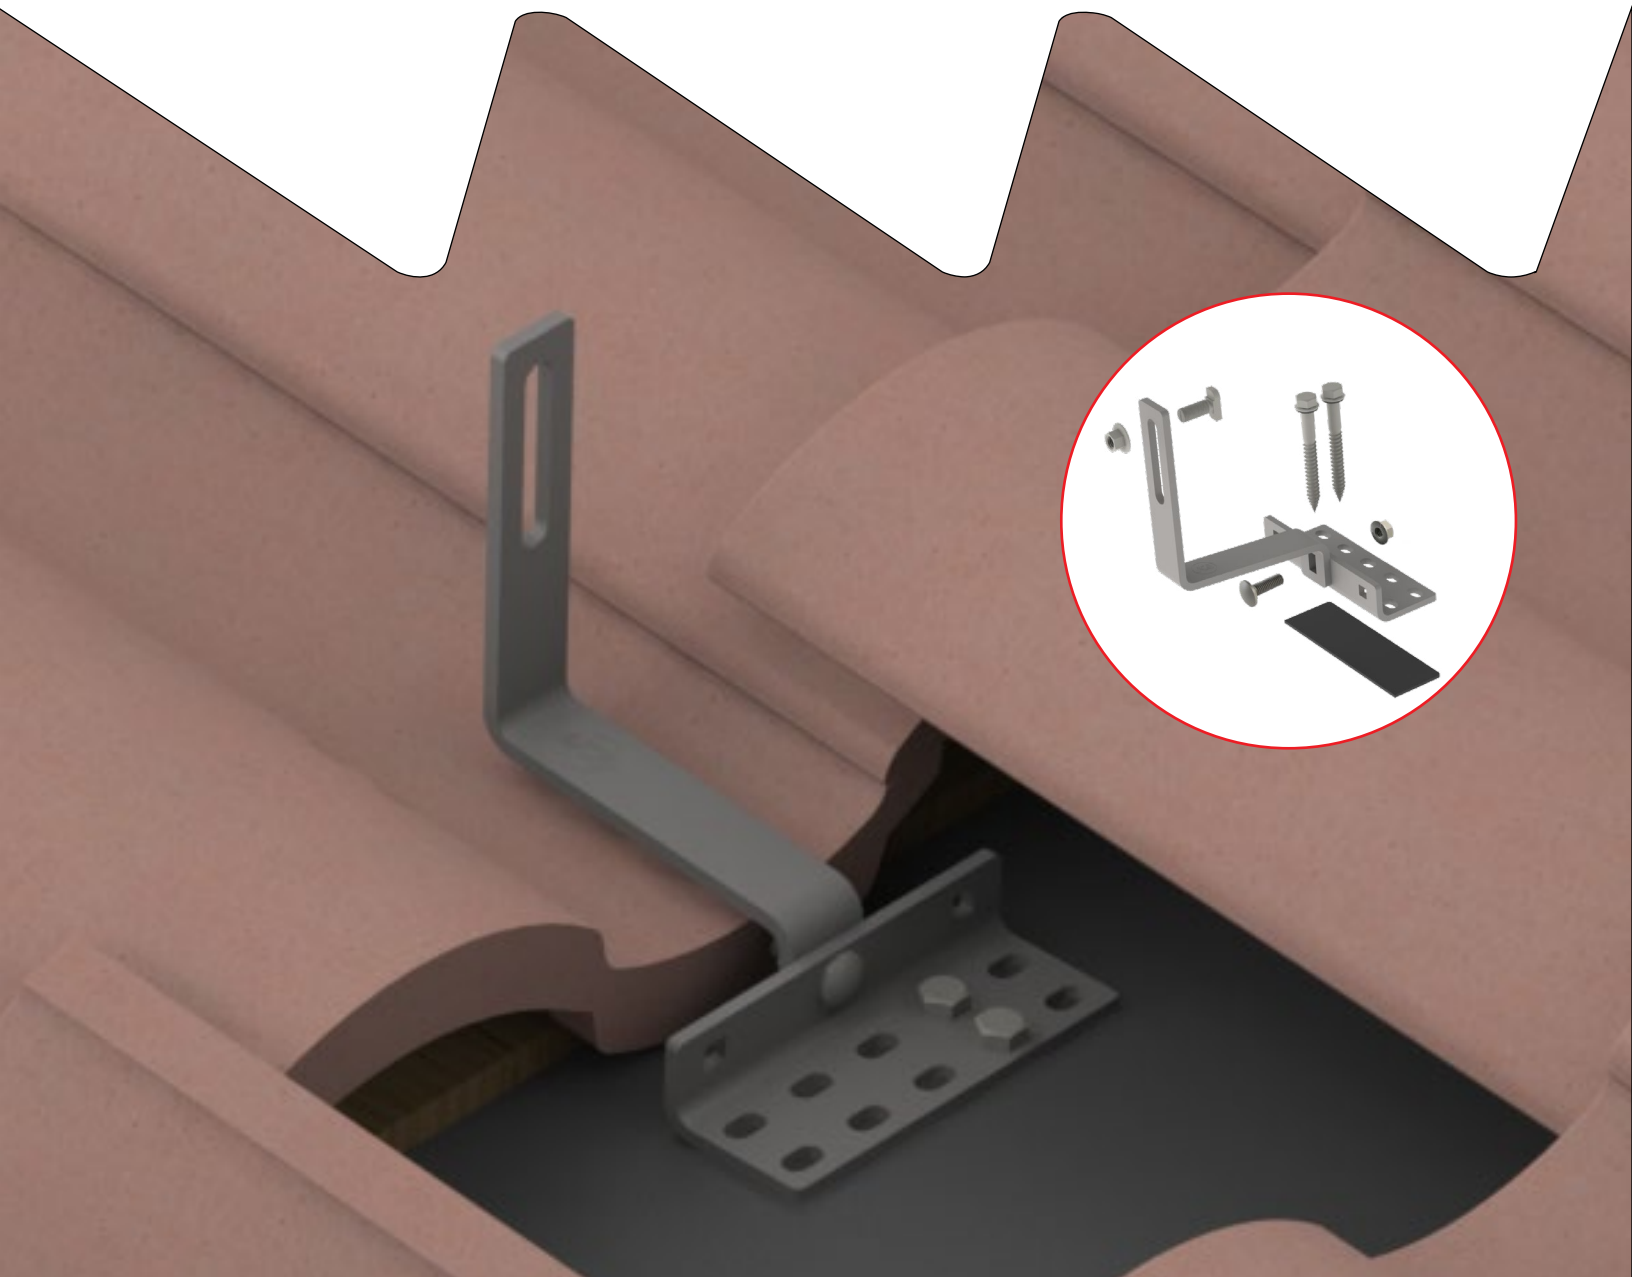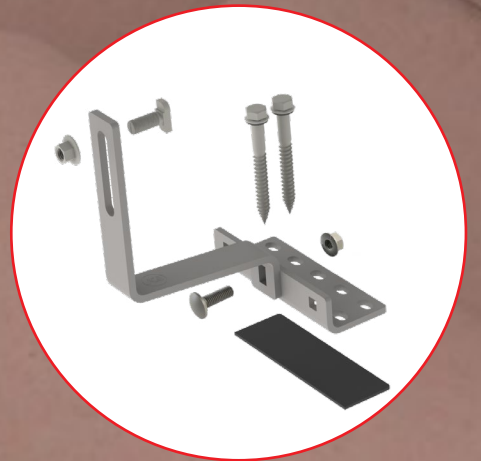

Components




- 1** 4000142 / 4000142-B /
4000142-B-US



USH +2, 5.5" Base Kit

Kit Includes:

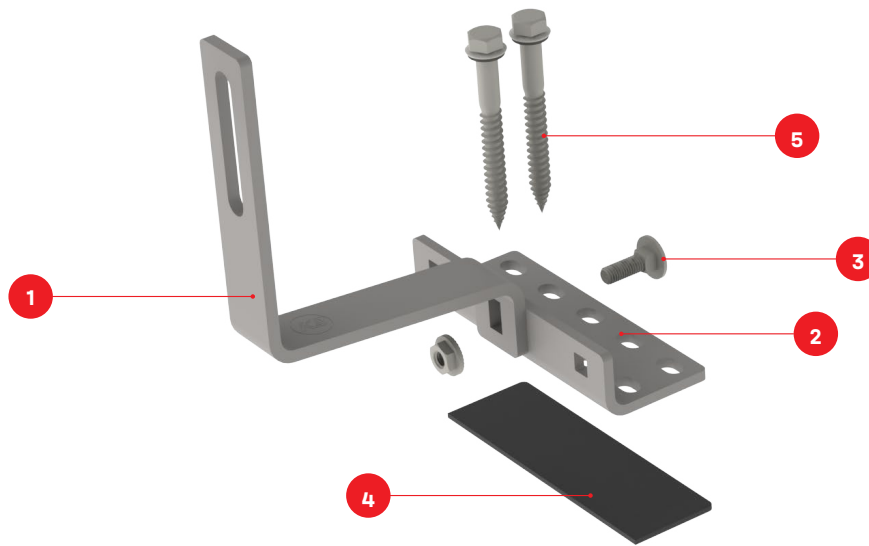


Item Number	Description	Part Number
1	Universal Standard Hook +2, Top	4000142-B USH +2, 5.5" Base Kit, w/K2 EverSeal
2	Universal Standard Hook +2, 5.5" Base	
3	Mushroom Head Bolt and Hex Flange Nut	
4	K2 EverSeal	
5	5/16" Lag Screws w/ EDPM Washers	


Tools Overview



Chalk Line
≥ 3.0 m



Tape Measure
≥ 6.0 m



Drill




Torque Wrench
6 - 35 Nm
(10-50 ft-lbs)



13mm Socket
10 ft-lbs

Assembly

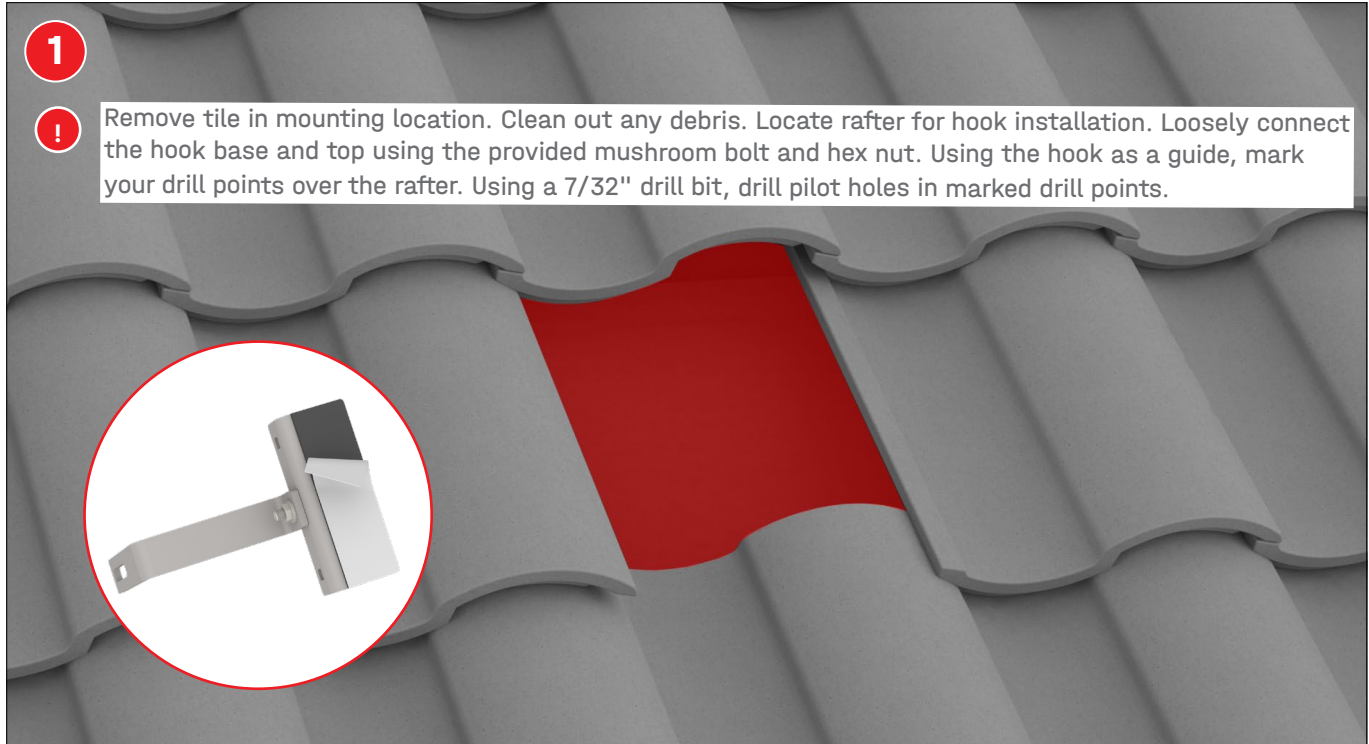

3



A. Install Replacement Flashing

Push back center tab to allow tile hook to pass through. Using roofing bars, prop up interlocking tiles to allow installation of replacement tile flashing. Place flashing and lower surrounding tiles to allow flashing to sit properly.

B. Grind/Notch Tile

Mark location of tile hook on the tile. Create a safe tile cutting station with proper safety precautions and equipment. Notch tile with a tile grinder or a tuck point diamond blade. Be sure tile is cut enough so that weather guards sit in their original position. *Some jurisdictions may require water or ventilation to prevent silica dust exposure. Always wear eye protection and safety mask.*

4



Insert the T-Bolt through the slot in the Universal Standard Hook and into the side channel of Cross-Rail. Turn the T-Bolt clockwise ensuring that the mark at the end of the shaft is vertical, indicating proper alignment. Attach the serrated flange nut and tighten to 26 ft-lbs (35 Nm). Double check that the alignment marking on the end of the T-Bolt shaft is vertical to ensure it is properly engaged. Refer to CrossRail Assembly Instructions for more detail on proper rail installation.

Proper T-Bolt Alignment


Incorrect

Correct





Connecting Strength

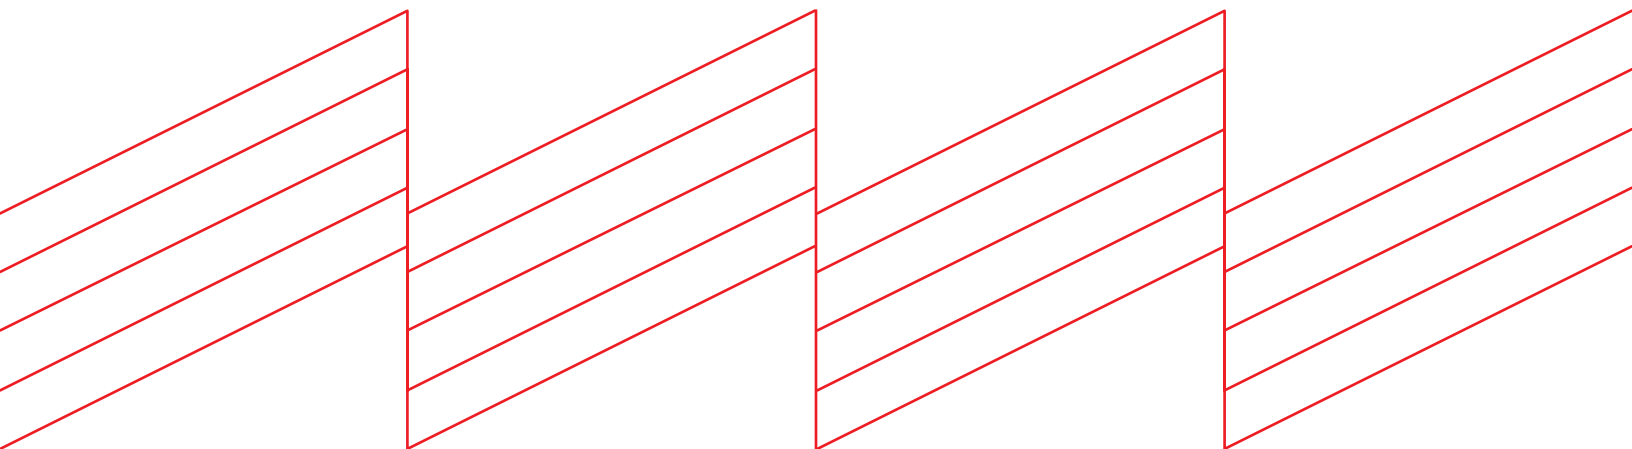

K2 Systems, LLC

4665 North Ave. Suite I • Oceanside, CA 92056 •
USA +1.760.301.5300 • infous@k2-systems.com
www.k2-systems.com/en-us

USH +2, 5.5" Base Kit Quick Guide ENV1 | 1024 • Subject to change
Product illustrations are exemplary and may differ from the original.

Everest Solar Systems S de RL de CV

Calle Coral 2628 Int. 1 • Col. Residencial
Victoria, CP 44560 • Guadalajara, Jal. • México
+52.33.3575.9380 • info@k2-systems.mx
www.k2-systems.com/es-mx

USH +2, 5.5" Base Kit Quick Guide ENV1 | 1024 • Sujeta a cambios
Las ilustraciones del producto son ejemplares y pueden diferir del original.