



Standing Seam PowerClamp



DATA SHEET

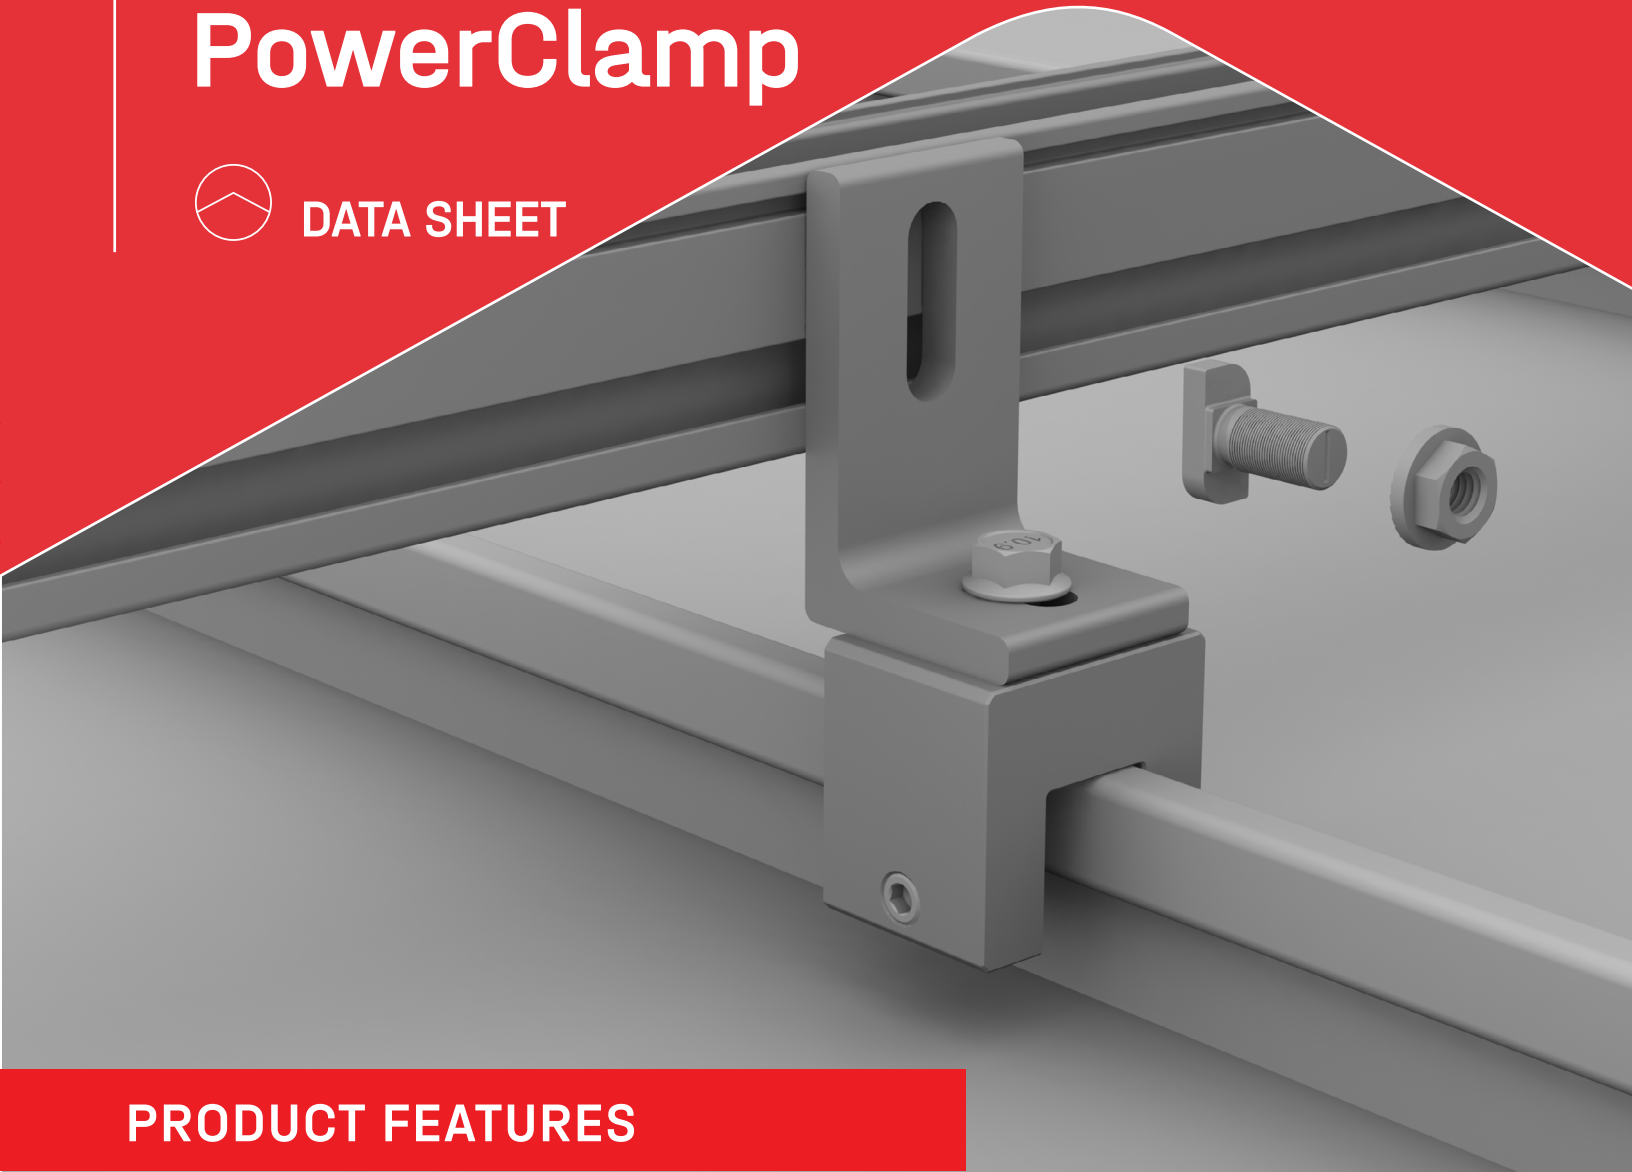


PRODUCT FEATURES




- / Cost competitive
- / Compatible with universal L-Foot
- / Compatible with Dual and Shared Rail systems
- / 6061-T6 Aluminum
- / Available in 1 bullet set screw (mini) and 2 bullet set screw (standard) sizes
- / Will not penetrate the roof seam
- / Ball point head eliminates marring of paint or damage to the roof panel seam

TECHNICAL DATA

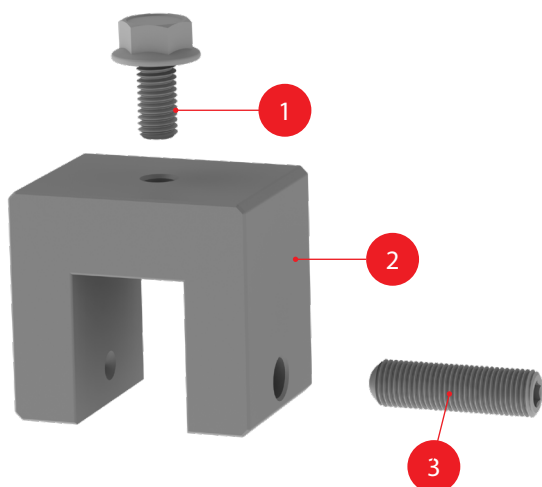

Mini

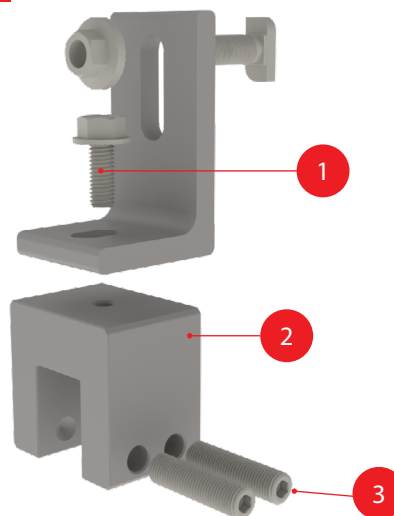


Standard

Item Number	Description	Part Number
1	T-Bolt M8×20 mm Serrated Hex Head	4000016 Standing Seam PowerClamp Mini, Set 4000017 Standing Seam PowerClamp Standard, Set 4000017-US Standing Seam PowerClamp Standard, Set, DC  *Standard PowerClamp kitted with L-Foot
2	PowerClamp	
3	Set Screw	

	Standing Seam PowerClamp
Roof Type	Standing seam
Material	6061-T6 Aluminum
Finish	Mill
Roof Connection	Clamp
Torque	22 Steel 15 ft-lb (20.3 Nm) - 16.6 ft-lbs (22.6 Nm) 24 Steel 12.5 ft-lbs (16.9 Nm) - 13.3 ft-lbs (18 Nm)
Compatibility	CrossRail 44-X, 44-X Max, 48-X, 48-XL, 80
Florida Product Approval (Only for the PowerClamp Standard)	FL#46869



Connecting Strength

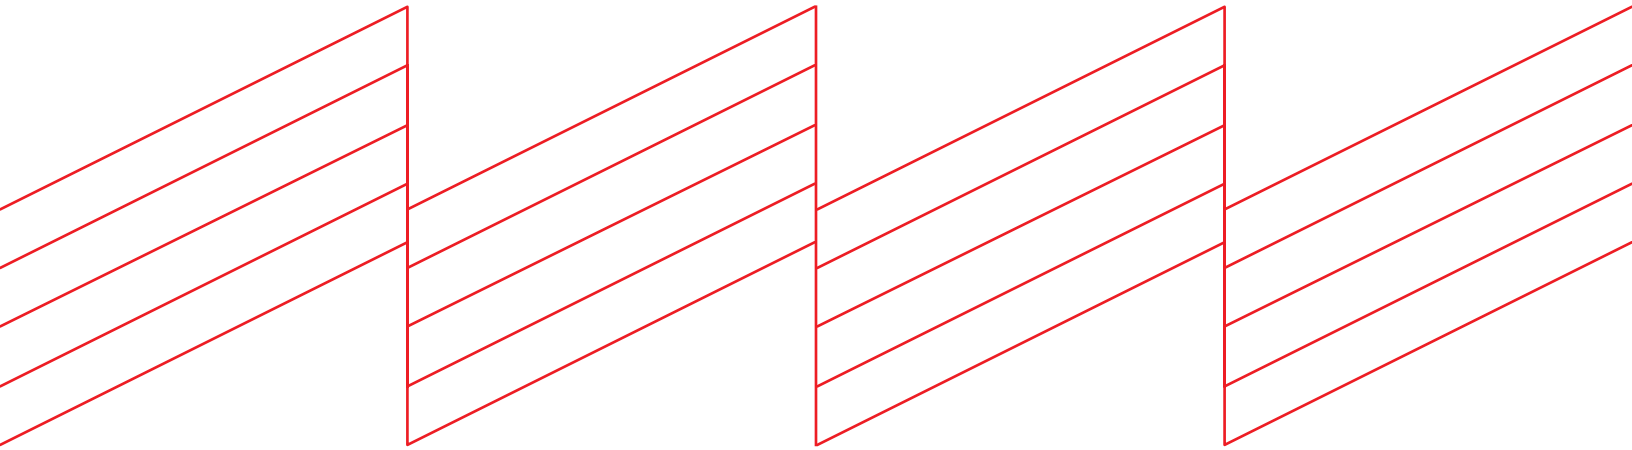

K2 Systems, LLC

4665 North Ave. Suite I • Oceanside, CA 92056 •
USA +1.760.301.5300 • infous@k2-systems.com
www.k2-systems.com/en-us

Everest Solar Systems S de RL de CV

Calle Coral 2628 Int. 1 • Col. Residencial
Victoria, CP 44560 • Guadalajara, Jal. • México
+52.33.3575.9380 • info@k2-systems.mx
www.k2-systems.com/es-mx