

K2 Lightning Ground Lug | Installation Guide

K2 Lightning Ground Lug

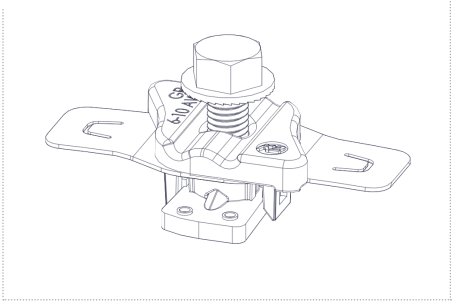


4000396
K2 Lightning Ground Lug, 13mm Hex Set

1 Place into Rail Slot

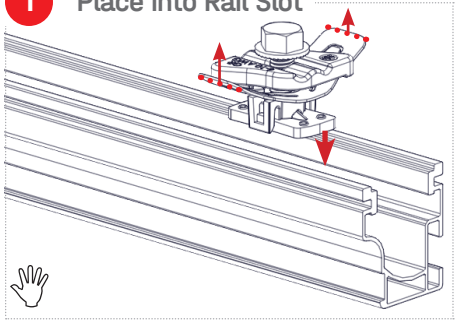


Lift up the plastic tabs on the MK3, lower the MK3 nut into the rail channel.

2 Rotate Into Final Position

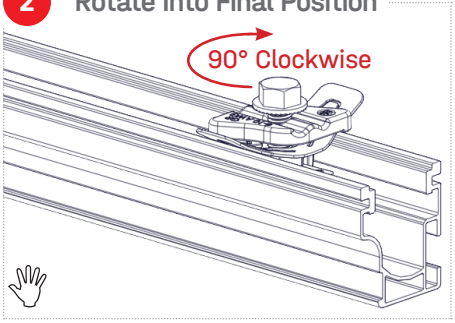


Turn it 90° clockwise to mount the K2 Ground Lug into the rail.

⚠ Confirm Correct Placement

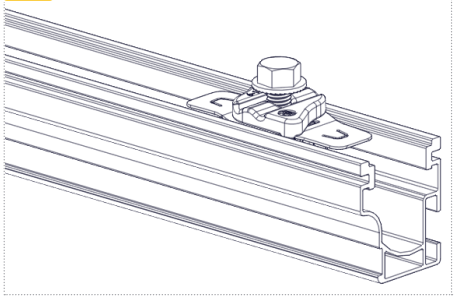


Make sure the K2 Lightning Ground Lug plate is sitting correctly in the rail grooves.

3 Engage Ground Wire

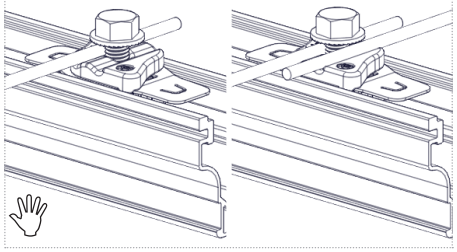


Insert a #6, #8 or #10 AWG solid or stranded copper wire into one of the cable channels. Insert second cable of same gauge, if necessary or needed.

⚠ Confirm Same Wire Size

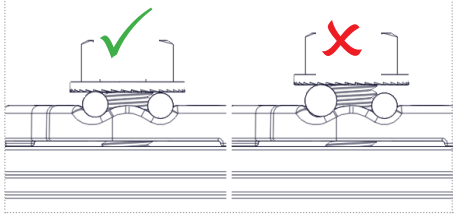

Avoid using different gauge wires if this feature is utilized

4 Tighten Terminal Screw

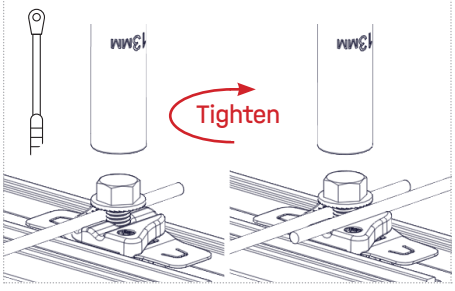

Tighten the terminal screw using a 13 mm socket.
8-10 ft-lbs (10.8-13.6 Nm)

Additional Information

Testing & Certification
UL 2703 Compliance
UL 467 Compliance

K2 Systems, LLC
4665 North Ave. Suite I • Oceanside, CA 92056 • USA
+1.760.301.5300 • infous@k2-systems.com
www.k2-systems.com/en-us