


T-Foot X



DATA SHEET

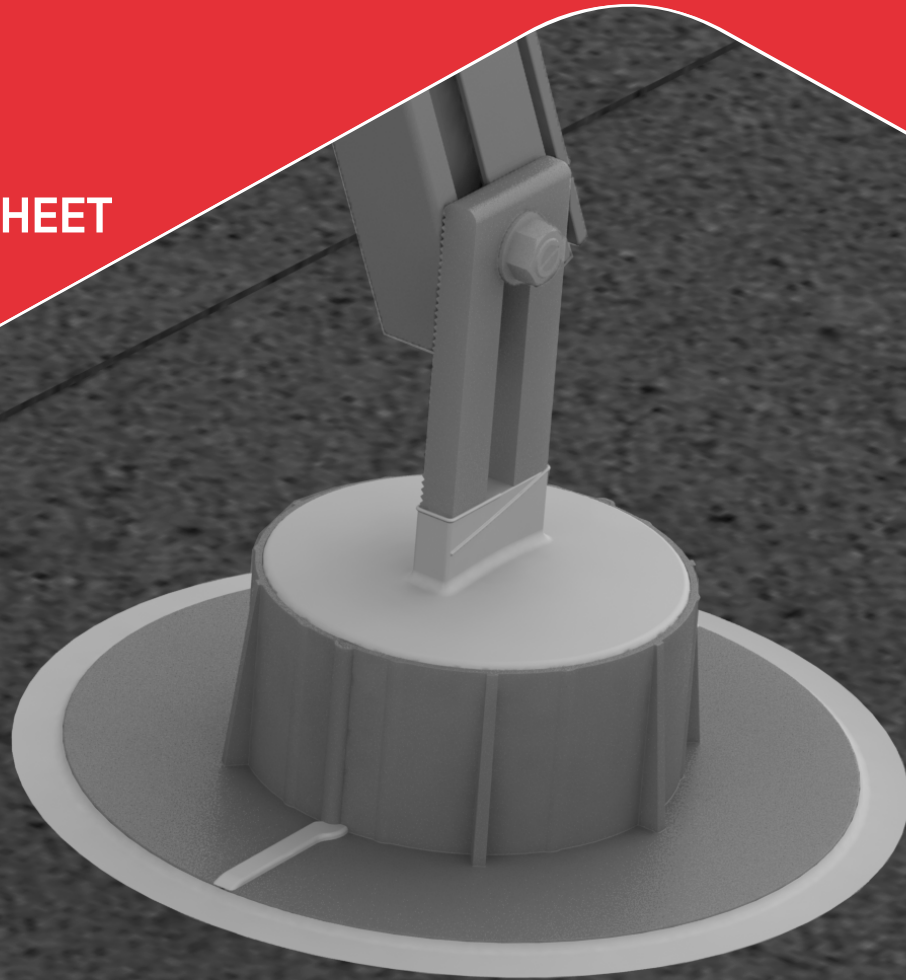


PRODUCT FEATURES

- / 6 inches tall
- / T-Bolt hardware included
- / Quick and easy to install
- / Applicable with all CrossRail systems
- / Made out of aluminum
- / Can use with Chem Link E-Curb



TECHNICAL DATA

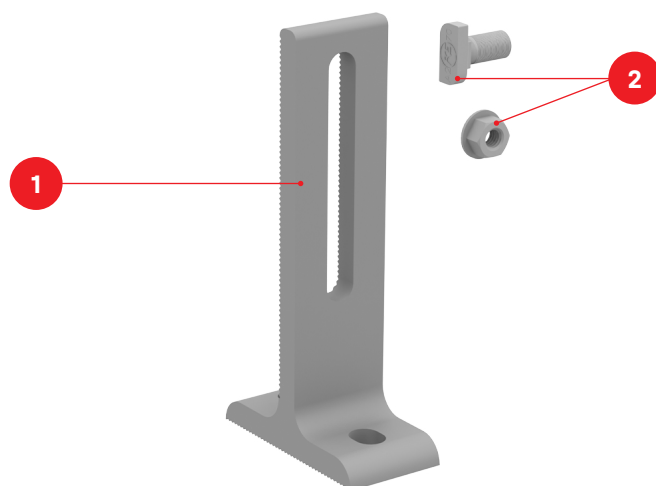


Item Number	Description	Part Number
1	T-Foot X, Set, Mill	4000080
2	T-Bolt & Hex Nut Set	

	T-Foot X, Set, Mill
Roof Type	Rolled, foam roofs
Material	Aluminum with stainless steel hardware
Finish	Mill
Roof Connection	5/16" lag screw
Code Compliance	UL 2703
Compatibility	CrossRail 44-X, 48-X, 48-XL, 80


MAXIMUM ALLOWABLE LOADS

	T-Foot X, Set, Mill
Uplift	700 lbs
Downforce	700 lbs
Shear (Dir1)	200 lbs
Shear (Dir 2)	400 lbs


Units: [in] mm

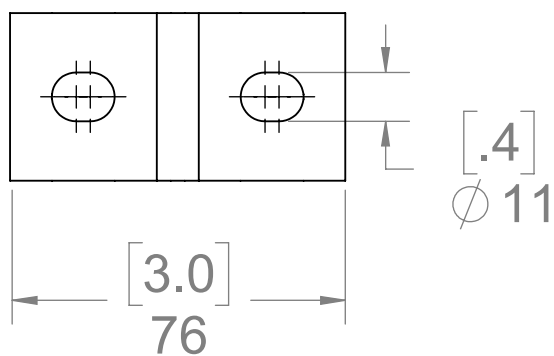

Shear (Dir 1)

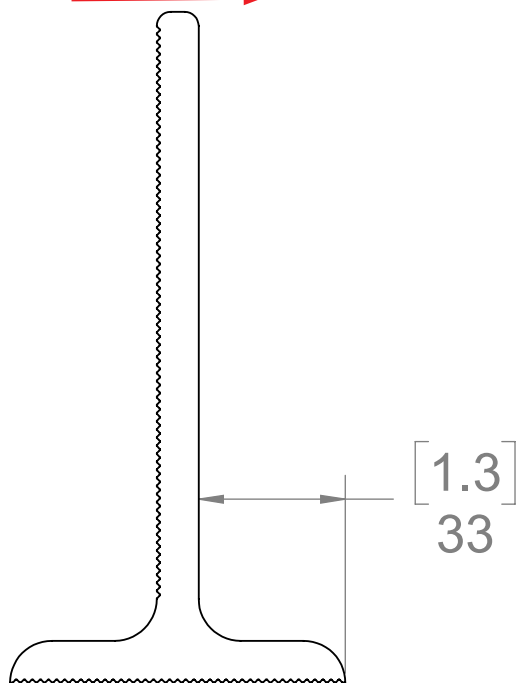


Shear (Dir 2)

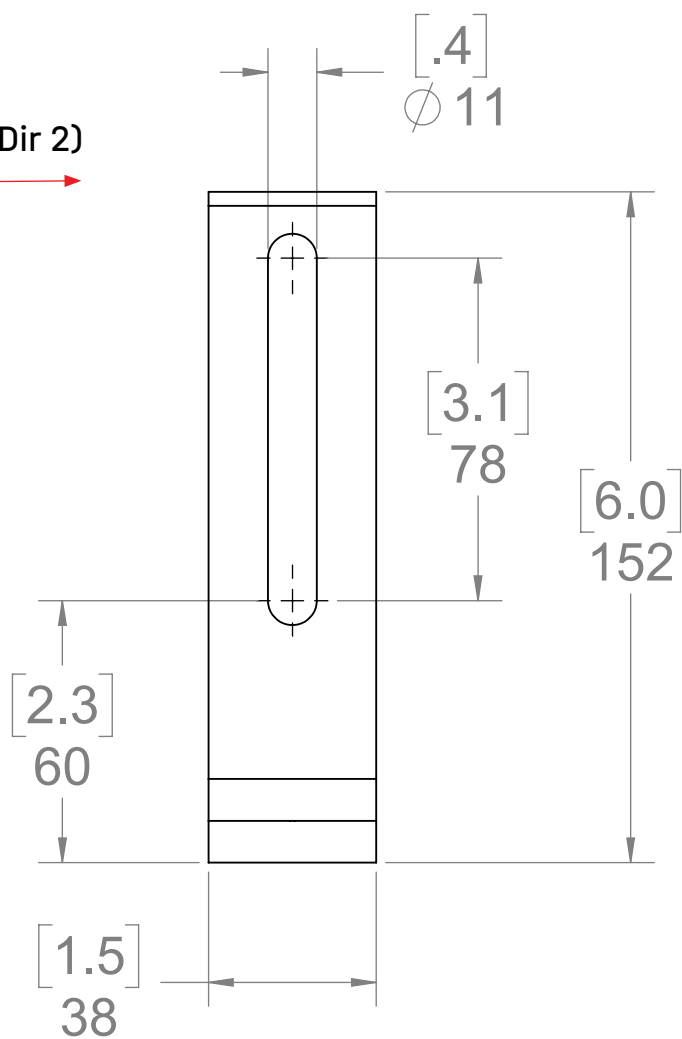



Connecting Strength

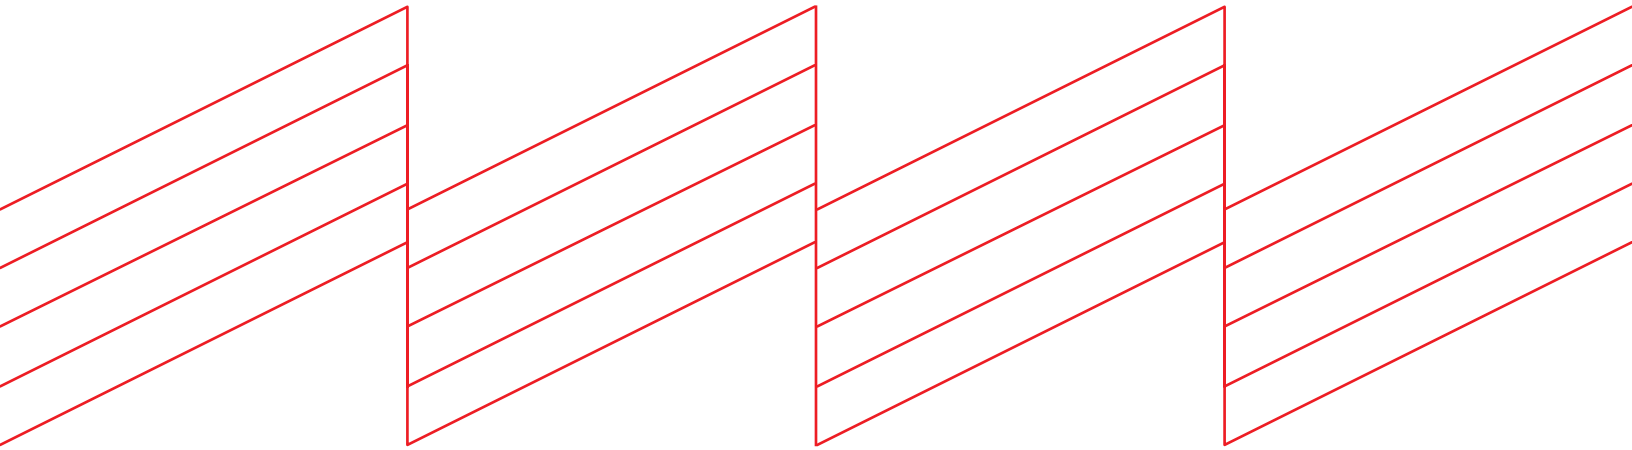

K2 Systems, LLC

4665 North Ave. Suite I • Oceanside, CA 92056 •
USA +1.760.301.5300 • infous@k2-systems.com
www.k2-systems.com/en-us

T-Foot X Data Sheet ENV1 | 1123 • Subject to change
Product illustrations are exemplary and may differ from the original.

Everest Solar Systems S de RL de CV

Calle Coral 2628 Int. 1 • Col. Residencial
Victoria, CP 44560 • Guadalajara, Jal. • México
+52.33.3575.9380 • info@k2-systems.mx
www.k2-systems.com/es-mx

T-Foot X Data Sheet ENV1 | 1123 • Sujeta a cambios
Las ilustraciones del producto son ejemplares y pueden diferir del original.